


PHS 系列 — 魚眼接頭 (軸端用接頭配件)

外觀圖形尺寸

CHELIC

魚眼接頭 (內牙)

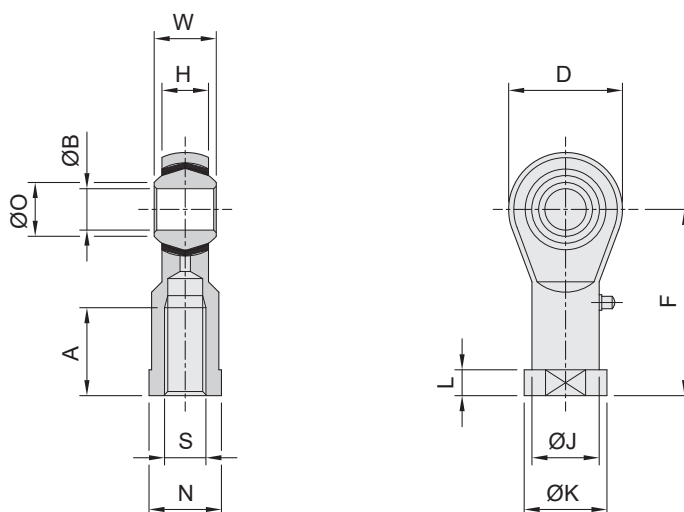

註：R → 右牙，L → 左牙；標準為右牙。

型 號	S	A	B	O	H	W	F	D	J	K	L	N	荷 重 S.load (KN)	重 量 W (g)
PHS – 5 (R/L)	M5x0.8	12	5	7.7	6	8	27	16	9	11	4	9	5	18
PHS – 6	M6x1.0	14	6	8.9	7	9	30	18	10	13	5	11	7	27
PHS – 8F	M8x1.0	17	8	10.4	9	12	36	22	13	16	5	14	11	46
PHS – 8	M8x1.25	17	8	10.4	9	12	36	22	13	16	5	14	11	46
PHS – 10F	M10x1.25	21	10	12.9	11	14	43	26	15	19	6.5	17	14	78
PHS – 10	M10x1.5	21	10	12.9	11	14	43	26	15	19	6.5	17	14	78
PHS – 12F	M12x1.25	24	12	15.4	12	16	50	30	18	22	6.5	19	17	115
PHS – 12	M12x1.75	24	12	15.4	12	16	50	30	18	22	6.5	19	17	115
PHS – 14F	M14x1.5	27	14	16.8	14	19	57	34	20	25	8	21	24	170
PHS – 14	M14x2.0	27	14	16.8	14	19	57	34	20	25	8	21	24	170
PHS – 16F	M16x1.5	33	16	19.3	15	21	64	38	22	27	8	22	28	230
PHS – 16	M16x2.0	33	16	19.3	15	21	64	38	22	27	8	22	28	230
PHS – 18	M18x1.5	36	18	21.8	17	23	71	42	25	31	10	27	35	320
PHS – 20	M20x1.5	40	20	24.3	18	25	77	46	28	34	10	30	40	420
PHS – 22	M22x1.5	43	22	25.8	20	28	84	50	30	37	12	32	52	540
PHS – 24	M24x2.0	48	25	29.6	22	31	94	56	34	42	12	36	60	750
PHS – 26	M26x1.5	36	25	29.6	22	31	94	60	34	42	12	42	60	940
PHS – 30	M30x2.0	56	30	34.8	26	37	110	67	40	50	15	41	81	1130
PHS – 36	M36x2.0	80	35	42	21	25	125	80	47	57	19	55	81	1300


PHS – 1/4	1/4-28 UNF	14	6.35	8.9	7	9	30	18	10	13	5	11	7	27
PHS – 5/16	5/16-24 UNF	17	7.94	10.4	9	12	36	22	13	16	5	14	11	46
PHS – 3/8	3/8-24 UNF	21	9.53	12.9	11	14	43	26	15	19	6.5	17	14	78
PHS – 1/2	1/2-20 UNF	24	12.70	15.4	12	16	50	30	18	22	6.5	19	17	115
PHS – 5/8	5/8-18 UNF	33	15.88	19.3	15	21	64	38	22	27	8	22	28	230
PHS – 3/4	3/4-16 UNF	36	19.05	21.8	17	23	71	42	25	31	10	27	35	320

POS 系列 — 魚眼接頭 (軸端用接頭配件)

外觀圖形尺寸

CHELIC

◎ 魚眼接頭 (外牙)

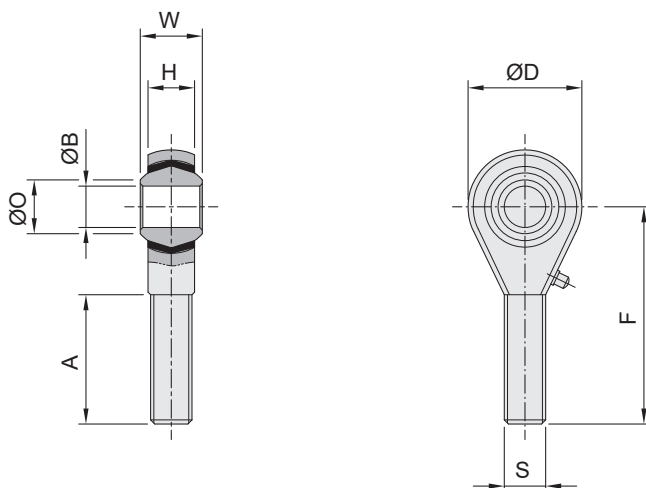

註：R → 右牙，L → 左牙；標準為右牙。

型 號	S	A	B	O	H	W	D	F	荷重 S.load (KN)	重量 W (g)
POS - 5 (R/L)	M5 x 0.8	20	5	7.7	6	8	16	33	5	14
POS - 6	M6 x 1.0	22	6	8.9	7	9	18	36	7	21
POS - 8F	M8 x 1.0	25	8	10.4	9	12	22	42	11	34
POS - 8	M8 x 1.25	25	8	10.4	9	12	22	42	11	34
POS - 10F	M10 x 1.25	29	10	12.9	11	14	26	48	14	58
POS - 10	M10 x 1.5	29	10	12.9	11	14	26	48	14	58
POS - 12F	M12 x 1.25	33	12	15.4	12	16	30	54	17	92
POS - 12	M12 x 1.75	33	12	15.4	12	16	30	54	17	92
POS - 14F	M14 x 1.5	36	14	16.8	14	19	34	60	24	135
POS - 14	M14 x 2.0	36	14	16.8	14	19	34	60	24	135
POS - 16F	M16 x 1.5	40	16	19.3	15	21	38	66	28	205
POS - 16	M16 x 2.0	40	16	19.3	15	21	38	66	28	205
POS - 18	M18 x 1.5	44	18	21.8	17	23	42	72	35	285
POS - 20	M20 x 1.5	47	20	24.3	18	25	46	78	40	370
POS - 22	M22 x 1.5	51	22	25.8	20	28	50	84	52	475
POS - 24	M24 x 2.0	57	25	29.6	22	31	56	94	60	650
POS - 30	M30 x 2.0	66	30	34.8	26	37	67	110	81	1070

POS - 1/4	1/4-28 UNF	22	6.35	8.9	7	9	18	36	7	27
POS - 5/16	5/16-24 UNF	25	7.94	10.4	9	12	22	42	11	46
POS - 3/8	3/8-24 UNF	29	9.53	12.9	11	14	26	48	14	78
POS - 1/2	1/2-20 UNF	33	12.70	15.4	12	16	30	54	17	115
POS - 5/8	5/8-18 UNF	40	15.88	19.3	15	21	38	66	28	230
POS - 3/4	3/4-16 UNF	44	19.05	21.8	17	23	42	72	35	320

CJ-M
浮動接頭

M□V
手推閥

CRJF
旋轉接頭

PCR
空壓誘導
止回閥

SA□
油壓
緩衝器

SHR
油壓
穩速器

QT
附消音器
排氣節流閥

SL□
消音器

P□S
魚眼接頭